

FluoTechnik
FLUORESCENT DYES SOLUTIONS 

C A T A L O G
HYDROLOGICAL TRACING

2026

FLUOTECHNIK.COM




ARTIFICIAL TRACERS IN HYDROLOGY

The use of artificial tracers in hydrogeology is a very ancient technique. It is an effective tool for managing and preserving water resources and protecting the environment. The increasing demand for hydrological assessments requiring the use of artificial tracers is motivated by two main factors: the challenge of managing water resources and the growth in pollutant shipments.

This new technique means that the fluorescent and saline properties of tracers can be employed to detect the point of origin of water, the location of run-off and hydraulic connections, and to reveal the risks of pollutants spreading. The results obtained can provide definitive answers to all these problems, helping empower economic and social actors regarding their environmental impact.

OVERVIEW OF THE DIFFERENT TRACERS

NAME OF TRACER	EXCIT.	EMIS.	SOLUBILITY	DETECTION THRESHOLD	COLOUR	VISIBILITY TO THE EYE	DEGRADATION	ABSORPTION	INTERFERENCES
URANIN	491 nm	515 nm	600g/L à 20°C	0,001 µg/L	Vert jaune	50 à 100 µg/L	UV; pH < 7; micro-organismes oxydants	Faible	Eosine Y
ACIDE AMINO G	345 nm	452 nm	Très faible	0,1 µg/L	Bleu pastel	Invisible	UV ; Oxydants	Moyenne à forte	Tinopal CBS-CL; Naphtionate
SULFORHODAMINE B	565 nm	585 nm	50 g/L	0,01 µg/L	Rouge Fuschia	>500 µg/L	Oxydants	Moyenne	Sulfo G
SULFORHODAMINE G	532 nm	552 nm	5 g/L	0,01 µg/L	Rouge orangé	>500 µg/L	Oxydants	Moyenne	Sulfo B
EOSINE Y	513 nm	537 nm	320 g/L	0,008 µg/L	Rouge	250 à 500 µg/L	UV; Oxydants; pH < 5	Faible	Uranine
NAPHTIONATE	320 nm	420 nm	240 g/L	0,1 µg/L	Bleu pastel	Invisible	UV; pH < 4 ou > 10, oxydants micro-organismes	Moyenne à forte	Tinopal CBS-CL; Acide amino-G
TINOPAL CBS-CL	350 nm	435 nm	25g/L	0,1µg/L	Bleu pastel	Invisible	UV; oxydants; pH < 7	Moyenne à forte	Naphtionate, Acide amino G
RODAMINE WT	558 nm	583 nm	-	0,01 µg/L	Violet	250 à 500 µg/L	Oxydants	Forte	Sulforhodamine B

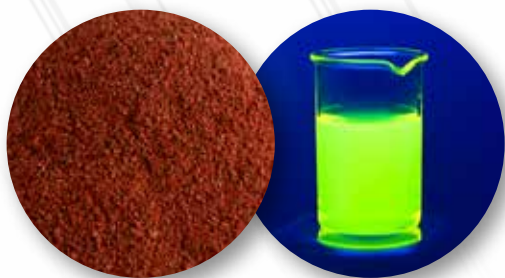

SODIUM FLUORESCHEIN

HYDROLOGICAL TRACING

APPLICATIONS

In the field of hydrology, sodium fluorescein is valued for its detection sensitivity and low adsorption. It is used to map underground watercourses, verify hydraulic connections, study transit and flow times, and measure river discharges. It is also used to analyze the pathways of infiltrating waters, check the tightness of layers, and simulate the spreading of liquid substances.

Sodium fluorescein is employed to diagnose networks and pipelines, detect leaks on roofs, and serve as a colorimetric marker in maritime safety.

TECHNICAL FEATURES

Chemical name	Sodium fluorescein, uranine, extra quality
Presentation	Powder : rouge brun / Liquide : Vert Jaune
CAS number	518-47-8
EINECS number	208-253-3
Color index	Acide Yellow 73, CI 45350
Detection threshold	0,001 mg/l
Visibility to the eye	50 à 100 µg/L
Emission / excitation wavelength	491nm - 515nm
Solubility	Very good - + de 500 g/l
Degradation	UV; pH < 7; Humidity content
Adsorption	Low
Interferences	Eosine
Purity	90% min
Chloride content	≈ 7%
Humidity content	≈ 5%
pH	≈ 9




READY TO USE



AVAILABLE IN
 WATER SOLUBLE BAG

Products	References
Fluorescein extra 250g	FLUO.250G
Fluorescein extra 1kg (water soluble bag)	FLUO.1KG
Fluorescein extra 5kg (5x1kg)(water soluble bag)	FLUO.5KG
Fluorescein 5 liters solution 30%	FLUO.CONC.5L

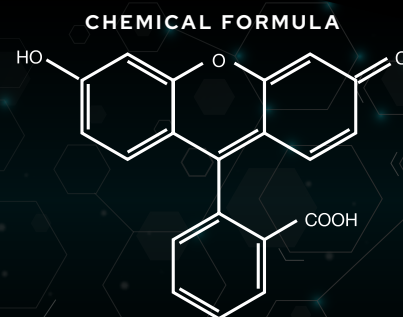



SULFORHODAMINE B

HYDROLOGICAL TRACING

APPLICATIONS

In the field of hydrology, Sulforhodamine B is a tool often used to map underground watercourses and verify hydraulic connections between different areas. It allows for the study of water transit and flow times, providing crucial information about aquifer dynamics. Hydrologists also use it to measure river discharges by tracking the tracer concentration downstream. This fluorescent dye is employed to analyze the pathways of infiltrating waters, helping to identify groundwater recharge zones. It plays a key role in checking the tightness of geological layers, enabling the detection of leaks in dams or reservoirs.

Simulating the spread of liquid substances is another important application, allowing for the anticipation of pollutant behavior in hydrological systems.



TECHNICAL FEATURES

Chemical name	Sulforhodamine B
Presentation	Powder: dark purple / Liquid: Fuchsia red
CAS number	3520-42-1
EINECS number	222-529-8
Detection threshold	0,01 µg/l
Visibility to the eye	> 500 µg/L
Emission / excitation wavelength	565ml - 585nm
Solubility	50 g/L
Purity	Min : 75%
Degradation	Oxydants
Adsorption	Average
Interferences	Sulforhodamine G




READY TO USE




AVAILABLE IN
 WATER SOLUBLE BAG

Products	References
Sulforhodamine B 250g	SULFOB.250G
Sulforhodamine B 1kg (water soluble bag)	SULFOB.1KG
Sulforhodamine B 5kg (5x1kg)(water soluble bag)	SULFOB.5KG
Sulforhodamine B 20% solution (saturated solution)	SULFOB.CONC.5L

CHEMICAL FORMULA

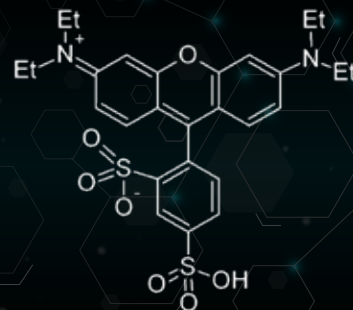

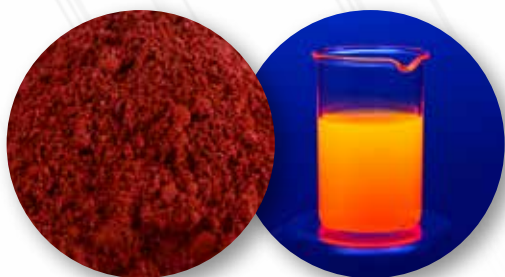

SULFORHODAMINE G

HYDROLOGICAL TRACING

APPLICATIONS

In the field of hydrology, Sulforhodamine G, also known as Amido Rhodamine G, is valued for its spectral properties. It is commonly used to map underground water-courses and verify hydraulic connections. This tracer is essential in studies of transit and flow times, as well as for measuring river discharges.

Sulforhodamine G also aids in analyzing the pathways of infiltrating waters and checking the tightness of geological layers. It is used to simulate the spread of liquid substances, thereby contributing to the management and protection of water resources.

TECHNICAL FEATURES

Chemical name	Sulforhodamine G / Amino Rhodamine G
Presentation	Powder: dark purple / liquid: orangey red
CAS number	5873-16-5
EINECS number	227-528-6
Detection threshold	0,01 µg/l
Visibility to the eye	>500 µg/L
Emission / excitation wavelength	532nm - 552nm
Purity	Min : 75%
Solubility	Low - about 5 g/l
Degradation	Oxidants
Adsorption	Average
Interferences	Sulforhodamine B



READY TO USE




AVAILABLE IN
WATER SOLUBLE BAG

Products	References
Sulforhodamine G 250g	SULFOG.250G
Sulforhodamine G 1kg	SULFOG.1KG
Sulforhodamine G 5kg (5x1kg)	SULFOG.5KG



CHEMICAL FORMULA

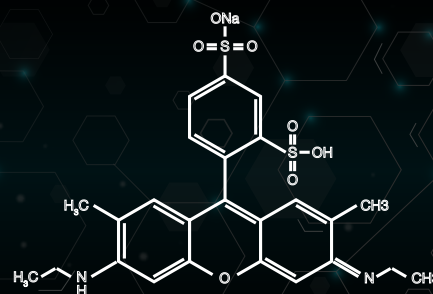



RHODAMINE WT 20%

HYDROLOGICAL TRACING

APPLICATIONS

Rhodamine WT is a widely used hydrological tracer valued for its spectral properties and high sensitivity. It is used to map underground watercourses, verify hydraulic connections, and study flow dynamics. Essential in transit analyses, it helps measure flow times and river discharges, providing valuable data on water mass behavior.

Beyond these applications, Rhodamine WT is used to examine the pathways of infiltrating waters and test the tightness of geological formations. It also plays a key role in simulating the spread of liquid substances, contributing to the management and protection of water resources against pollution.



TECHNICAL FEATURES


Chemical name	Rhodamine WT 20%
Presentation	Concentrated liquid, dark purple in colour
CAS number	37299-86-8
Detection threshold	0,01 µg/l
Visibility to the eye	250 à 500 µg/L
Emission / excitation wavelength	558/583
Degradation	Oxidants
Adsorption	Strong
Interferences	Sulforhodamine B



READY TO USE

Products	References
Rhodamine WT 20% 100g (20% Liquid Solution)	RHODA.WT20.100G
Rhodamine WT 20% 1Kg (20% Liquid Solution)	RHODA.WT20.1KG
Rhodamine WT 20% 25 Kg (20% Liquid Solution)	RHODAWT20-25KG

CHEMICAL FORMULA

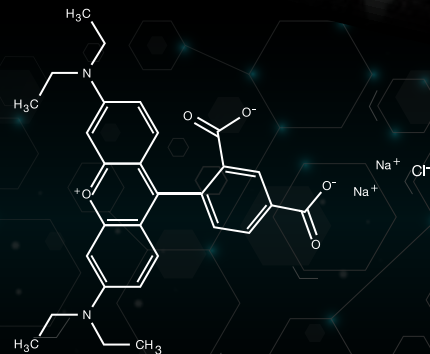



EOSIN

HYDROLOGICAL TRACING

APPLICATIONS

With spectral and physico-chemical properties similar to Fluorescein, Eosin is a tracer used to map underground watercourses, verify hydraulic connections, conduct transit and flow-time studies, measure river discharges, study the pathways of infiltrating waters, check the tightness of layers, and simulate the spread of liquid substances.

Eosin is also used for various leak diagnostics in networks and pipelines, detecting leaks in roofs and terraces, coloring chemical and maintenance products, and in medical and research fields.

TECHNICAL FEATURES

Chemical name	Eosin Y
Presentation	Powder: reddish / liquid: orangey red
CAS number	17372-87-1
EINECS number	241-409-6
Detection threshold	0,008 mg/l
Visibility to the eye	250 à 500 µg/L
Emission / excitation wavelength	513nm - 537nm
Solubility	Good → 300 g/l
Purity	Min. : 85%
Degradation	UV ; Oxydants ; Ph < 5
Adsorption	Low
Interferences	Uranine



READY TO USE




AVAILABLE IN
WATER SOLUBLE BAG

Products	References
Eosin extra 250g	EOS.250G
Eosine extra 1kg (water soluble bag)	EOS.1KG
Eosine extra 5kg (5x1kg)(water soluble bag)	EOS.5KG
Eosin 20% solution (concentrated solution)	EOS.CONC.5L



CHEMICAL FORMULA

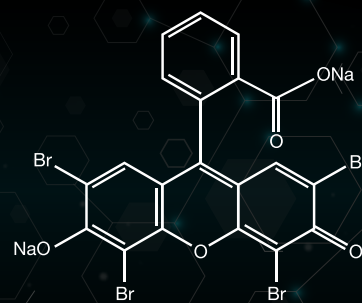



AMINO G ACID

HYDROLOGICAL TRACING

APPLICATIONS

Amino G Acid is a highly regarded hydrological tracer valued for its spectral properties and low coloration, providing excellent visibility in various applications. It is commonly used to map underground watercourses, verify hydraulic connections, and analyze flow dynamics. Due to its sensitivity, it enables the study of transit times and precise measurement of river discharges.

Moreover, Amino G Acid plays a key role in analyzing the pathways of infiltrating waters and checking the tightness of geological formations. It is also used to simulate the spread of liquid substances, thereby contributing to the management and preservation of water resources.

TECHNICAL FEATURES

Chemical name	Monosodium salt, Acid 7 - aminonaphthalene
Presentation	Powder: white - greyish / Liquid: pastel blue
CAS number	86-65-7
EINECS number	201-689-2
Detection threshold	0,1 µg/l
Visibility to the eye	Invisible
Emission / excitation wavelength	345 nm - 452 nm
Solubility	Low - < 5 g/l
Purity	Min. : 80%
Degradation	UV ; Oxidants
Adsorption	Average to high
Interferences	Tinopal CBS-X, Naphtionate





AVAILABLE IN
 WATER SOLUBLE BAG

Products	References
Amino G Acid 250g	AMINOG.250G
Amino G Acid 1kg (water soluble bag)	AMINOG.1KG
Amino G Acid 5kg (5x1kg)(water soluble bag)	AMINOG.5KG



CHEMICAL FORMULA

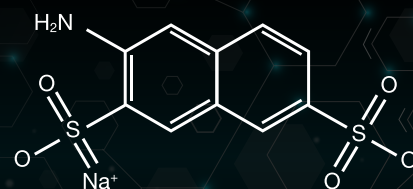



TINOPAL

HYDROLOGICAL TRACING

APPLICATIONS

Tinopal is a colorless hydrological tracer, also known as an optical brightener, widely used for studying underground flows. It allows for the mapping of underground watercourses, verification of hydraulic connections, and analysis of flow dynamics. **Due to its sensitivity, it facilitates transit studies, the calculation of flow times, and the measurement of river discharges.**

Additionally, Tinopal is used to track the pathways of infiltrating waters and test the tightness of geological formations. **Its use extends to simulating the spread of liquid substances, playing a key role in the management and protection of water resources.**



TECHNICAL FEATURES

Chemical name	Tinopal CBS-CL liquid 10%
Presentation	Powder: yellow / Liquid: pastel blue
CAS number	38775-22-3
Detection threshold	0,1 µg/L
Visibility to the eye	Invisible
Emission / excitation wavelength	350nm - 435nm
Solubility	Very low – about 25 g/l
Degradation	UV ; oxidants ; pH < 7
Adsorption	Average to high
Interferences	Naphtionate, Acide-Amino-G



READY TO USE



AVAILABLE IN
WATER SOLUBLE BAG

CHEMICAL FORMULA



Products	References
Tinopal CBS-X 1kg	TINO.CBSX.1KG
Tinopal CBS-CL 20L (10% Solution - UNIQUEMENT SUR COMMANDE)	TINO.CBSCL.20L



SODIUM NAPHTIONATE

HYDROLOGICAL TRACING

APPLICATIONS

Sodium Naphtionate is a hydrological tracer, also classified as an optical brightener, known for its spectral properties and low coloration. It is commonly used to map underground watercourses, verify hydraulic connections, and analyze flow dynamics. Due to its sensitivity, it allows for transit studies, the evaluation of flow times, and the precise measurement of river discharges.

Moreover, Sodium Naphtionate is used to track the pathways of infiltrating waters and test the tightness of geological formations. It is also employed to simulate the spread of liquid substances, playing a key role in the management and preservation of water resources.

TECHNICAL FEATURES

Chemical name	Sodium Naphtionate
Presentation	Powder: white / liquid: pastel blue
CAS number	130-13-2
Detection threshold	0,1 µg/l
Visibility to the eye	Invisible
Emission / excitation wavelength	320nm - 420nm
Solubility	Moderate - about 200 g/l
Purity min.	75%
Insoluble	≈ 0,12%
Degradation	UV; Ph < 4 or > 10; oxidising micro-organisms
Absorption	Average to high
Interferences	Tinopal CBS-X, Acide-Amino-G




AVAILABLE IN
 WATER SOLUBLE BAG

Products	References
Sodium Naphtionate 250g	NAPH.250G
Sodium Naphtionate 1kg	NAPH.1KG
Sodium Naphtionate 5kg	NAPH.5KG



CHEMICAL FORMULA





POTASSIUM IODIDE

HYDROLOGICAL TRACING

APPLICATIONS


Potassium iodide (KI) is used in hydrological tracing due to its high solubility, chemical stability, and inertness towards natural materials. It dissolves rapidly in water and interacts very little with soils or rocks, allowing for precise tracking of water flows. **Easily detectable at very low concentrations using colorimetric or electrochemical methods, it serves as a reliable tracer for studying underground flows or the dispersion of pollutants.**

Potassium iodide (KI) is an inorganic salt composed of potassium ions (K⁺) and iodide ions (I⁻). It appears as highly water-soluble white crystals. Stable at room temperature, it is relatively non-reactive but can slowly oxidize in air, releasing elemental iodine. Its ionic nature gives it good conductivity in aqueous solutions, aiding in its detection. **Non-toxic in low doses, it is commonly used as a tracer or chemical reagent in various applications.**


TECHNICAL FEATURES

Chemical name	Potassium iodide
Quality	Extra Pure
Molecular formula	KI
Chemical structure	K+I-
ICAS number	7681-11-0
EC number	231-659-4
Shelf life	2 years
Characteristics	<p>Potassium Identification: Positive Iodide identification: Positive Test : 99.0 – 100.5% Loss on drying : 1.0% max. Heavy metals : 10 ppm max. Sulphate : 150 ppm max. Iron : 20 ppm max</p>

Products	References
Iodure de potassium vrac fut 25kg - (ONLY TO ORDER)	IOD.POT.25KG
Iodure de potassium vrac fut 12kg - (ONLY TO ORDER)	IOD.POT.12KG

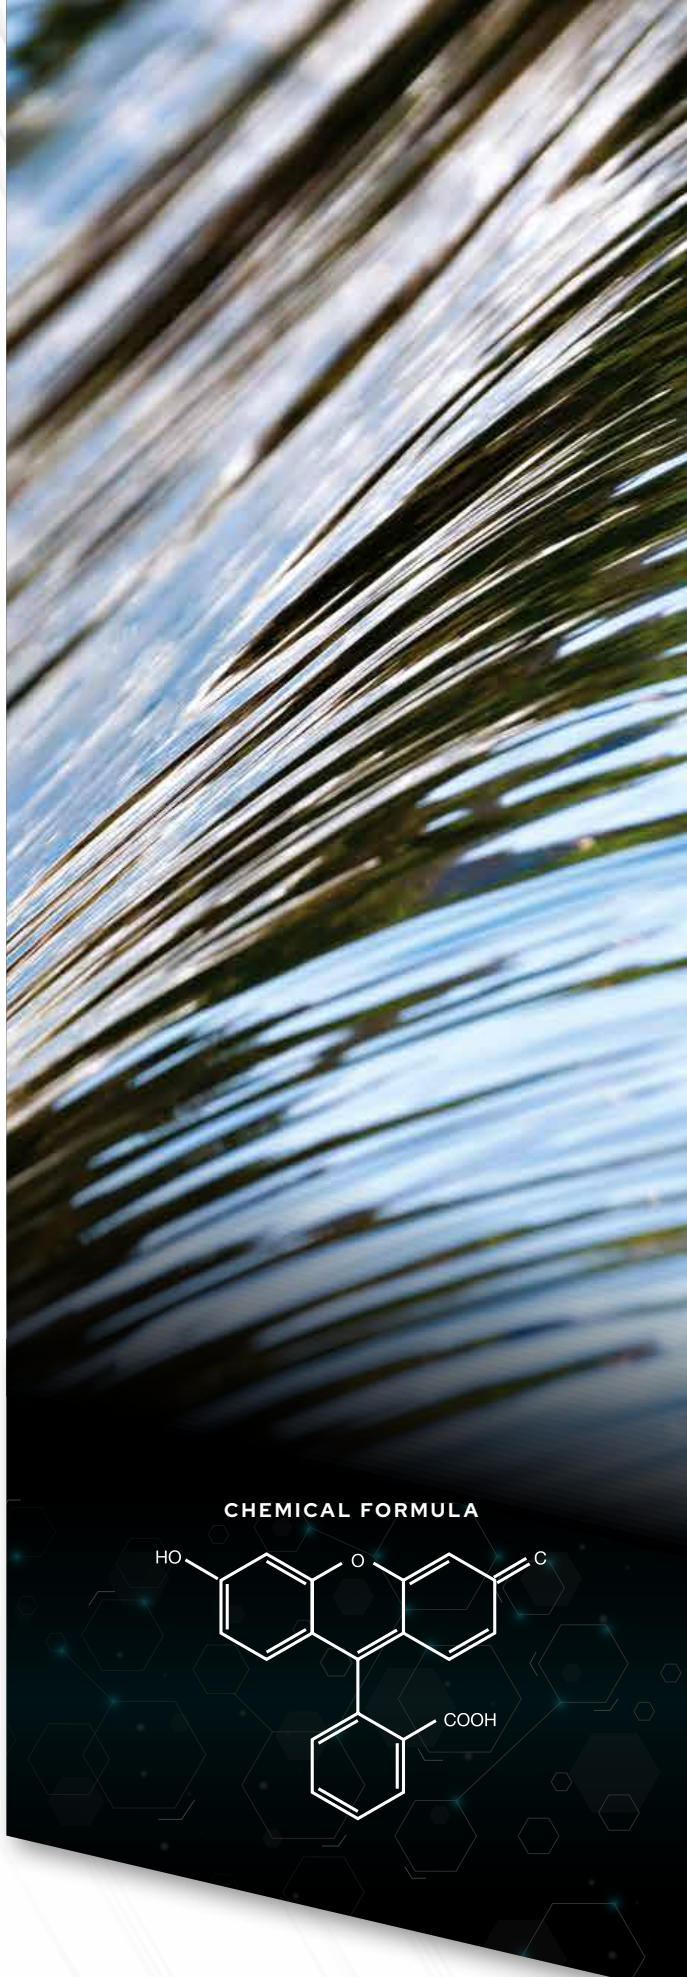

CHEMICAL FORMULA

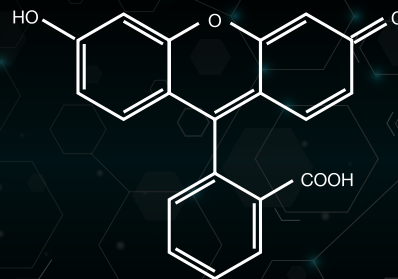

EnviroLOG

HYDROLOGICAL TRACING

EnviroLOG is a standalone environmental hub that incorporates all that you require for a **survey operation - command and control of your sensors, data display, data logging and battery power in a small robust package.**

Up to 3 devices can be interfaced to EnviroLOG where a user definable observation scenario can be programmed to control those devices as a group. EnviroLOG is designed for Valeport's Hyperion range of Fluorometer sensors: Chlorophyll a, Fluorescein, Rhodamine, Phycocyanin and Turbidity.

EnviroLOG will automatically recognise the type of sensor interfaced and suitable header and units fields can be populated. **A 7.2 or 14Ah battery can be fitted to supply power for all three sensors.** The data is stored internally and can be recovered either over Bluetooth or through the serial comms\ charging port.

	Optical	Linear Range		Minimum Detection
		Nephelometer	Optical Backscatter	
Turbidity	850 nm	0 to > 1,000 - linear response	0 to > 6,000 - linear response	0.03 NTU

(>6.000 NTU a une réponse monotone non linéaire qui permet de dériver des valeurs plus élevées en utilisant des tables de recherche)



Fluorophore	Excitation	Detection	Dynamic Range	Minimum Detection
fDOM/CDOM**** (fluorescent Dissolved Organic Matter)	365 nm	470 nm	0 - 2000 ppb	0.5 ppb
Fluorescein**** (Uranine)	470 nm	545 nm	0 - 500 ppb	0.01 ppb
Rhodamine****	520 nm	650 nm	0 - 1000 ppb	0.01 ppb
Chlorophyll a*	470 nm	696 nm	0-800 ug/l	0.025 ug/l
Phycocyanin** (Fresh Water Blue Green Algae)	590 nm	650 nm	0-9000 ppb	0.08 ppb
Crude Oil***	365 nm	410 - 600 nm	0 - 1500 ppb	0.2 ppb

* Calibrated against Chlorophyll a in an acetone solution | ** Calibrated against Phycocyanin in water\Phosphate buffer solution | *** Calibrated against PTSA | **** Calibrated against Fluorescein\Rhodamine solution - Linearity measured to better than 0.99 R2

Product	References
ENVIROLOG	EnviroLOG

EnviroLOG 4G

HYDROLOGICAL TRACING

Valeport's EnviroLog 4G is a rugged, ultra-low-power 4G remotecontrol, telemetry and logging module providing a flexible solution for harsh environmental conditions. It has an industry-leading range of data collection, delivery and management options. The EnviroLog 4G is effectively a "platform" that offers fully scriptable operational scenarios for the collection, handling and delivery of data from a number of Valeport instruments. Specific data collection scenarios can be scripted quickly and with no firmware development involved and even updated 'over the air' with no need to visit the site.

Valeport can assist with sample scripts for you to adapt if required. EnviroLog 4G has highly efficient power management capabilities that enable long battery life even when performing complex scripts and calculations.

MARKET

- Environmental monitoring
- Surface Water and Wastewater
- Utilities
- Industrial
- Coastal monitoring



OPERATING MODES

For battery operation, the EnviroLog 4G stays in ultra low-power sleep mode and wakes up on a trigger or internal timer to collect data from the interfaced instrument(s). **It will transmit the data as scheduled, or on scripted conditions.** For more information see the data sheet

Products	References
ENVIROLOG 4G	EnviroLOG 4G

HYPERION FLUORESCCEIN

HYDROLOGICAL TRACING

Hyperion Fluorometer sensor range delivers high performance measurements of Chlorophyll a, Phycocyanin, Fluorescein (Uranine), or Rhodamine in a compact & robust package ideal as a standalone sensor, for ROV and AUV integration or used with as part of a multi-sensorarray and data logger.

Offered as standard in a 6000m depth rated, titanium housing the Hyperion Fluorometer has a wide range (9-28V DC) isolated power supply, data output up to 32Hz and RS232, RS485 and Modbus communications.

Hyperion Fluorometers can be supplied in a more rugged form that includes Acetal protection rings, a shaped anti-s snag connector cover and a Kevlar weave protected cable.

TECHNICAL FEATURES

	Fluorescein*
Excitation	470 nm
Detection	545 nm
Dynamic Range: gain setting is software controlled	0-500 ppb 2 gain settings: 0-25, 0-500
Minimum Detection (3x SD in RO water)	0.01 ppb
Linearity	0.99 R2
Response Time	0.03 - 2 sec
Output Rate	0.5 Hz - 32 Hz (free running) software controlled

* Calibrated against Fluorescein/Rhodamine solution



ELECTRICAL

External	9 - 28V CC, Isolé
Power	<600mW
Connector	SubConn MCBH6F

ORDERING

0901001 - F	Fluorescein (Uranine) Supplied with: • 1x Hyperion Instrument • 1x 0.5m pig tail • Manual and transit case • DataLog x2 Software
0901EA2	• Hyperion interface cable to Envirolog system • Cable Several cable lengths available

SOFTWARE

Valeport supply DataLog x2 Windows software for instrument setup, data download and display.

PHYSICAL

Materials	Titanium with Sapphire glass window
Depth Rating	6 000m
Dimensions	40mmØ x 179.5mm (including connector)
Weight	0.50 kg (in air) 0.26 kg (in water)
Operating Temp	-5°C - 35°C (the sensor is damaged above 60°C)

COMMUNICATIONS

The instrument will operate in real time, with set up performed by direct communications with a PC before and after deployment.

RS232 RS485	Baud rate: 2400 - 230400 8 data bits 1 stop bit No parity No flow control USB: cable and converter supplied (RS232 to USB)
RS485 Modbus RTU	Baud rate: 2400 - 230400 8 data bits 1 stop bit No parity No flow control

Products	References
HYPERION FLUORESCCEIN	Hyperion FLUO

HYPERION RHODAMINE

HYDROLOGICAL TRACING

Hyperion Fluorometer sensor range delivers high performance measurements of Chlorophyll a, Phycocyanin, Fluorescein (Uranine), or Rhodamine in a compact & robust package ideal as a standalone sensor, for ROV and AUV integration or used with as part of a multi-sensor array and data logger.

Offered as standard in a 6000m depth rated, titanium housing the Hyperion Fluorometer has a wide range (9-28V DC) isolated power supply, data output up to 32Hz and RS232, RS485 and Modbus communications.

Hyperion Fluorometers can be supplied in a more rugged form that includes Acetal protection rings, a shaped anti-snap connector cover and a Kevlar weave protected cable.

TECHNICAL FEATURES

	Rhodamine*
Excitation	520 nm
Detection	650 nm
Dynamic Range: gain setting is software controlled	0-1000 ppb 2 gain settings: 0-50, 0-1000
Minimum Detection (3x SD in RO water)	0.01 ppb
Linearity	0.99 R2
Response Time	0.03 - 2 sec
Output Rate	0.5 Hz - 32 Hz (free running) software controlled

* Calibrated against Fluorescein/Rhodamine solution



ELECTRICAL

External	9 - 28V DC Isolated
Power	<600mW
Connector	SubConn MCBH6F

ORDERING

0901001 - R	Instrument Hyperion Rhodamine
	Fourni avec : <ul style="list-style-type: none"> • Câble en Y • Manuel et étui de transport • Logiciel DataLog X2 L'ensemble dans une valise de transport
0901EA2	<ul style="list-style-type: none"> • Câble d'interface Hyperion vers système Envirolog • Plusieurs longueur de câble disponibles

SOFTWARE

Valeport supply DataLog x2 Windows software for instrument setup, data download and display.

PHYSICAL

Materials	Titanium with Sapphire glass window
Depth Rating	6 000m
Dimensions	40mmØ x 179.5mm (including connector)
Weight	0.50 kg (in air)
	0.26 kg (in water)
Operating Temp	-5°C - 35°C (the sensor is damaged above 60°C)

COMMUNICATIONS

The instrument will operate in real time, with set up performed by direct communications with a PC before and after deployment.

0901001 - R	Rhodamine
	Supplied with: <ul style="list-style-type: none"> • 1x Hyperion Instrument • 1x 0.5m pig tail • Manual and transit case • DataLog x2 Software
0901EA2	<ul style="list-style-type: none"> • Hyperion interface cable to Envirolog system • Cable Several cable lengths available

Products	References
HYPERION RHODAMINE	Hyperion RHODA

HYPERION PHYCOCYANIN

HYDROLOGICAL TRACING

Valeport's Hyperion range of fluorometers measures high-precision levels of chlorophyll A, phycocyanin (freshwater blue-green algae), crude oil, fluorescein (uranine), sulforhodamine B or rhodamine. The compact and rugged «Hyperion» range is ideal for use as a stand-alone sensor, connected to our stand-alone data loggers such as EnviroLog / EnviroLog 4G and other data loggers on the market, as well as all telemetry automats on the market.

Available as standard in a titanium case capable of withstanding a depth of 6000 m, the Hyperion fluorometer is equipped with a wide-range isolated power supply (9-28 VDC), data output up to 16 Hz and RS232 and RS485 interfaces with ASCII and Modbus. RTU. Hyperion 2 offers the best dynamic range on the market, requiring no adjustment or gain setting. The detection range of the phycocyanine fluorometer is 0 to 9000 ppm. Hyperion fluorometers are available in a more resistant version. This includes acetal protection rings, anti-snap connector protection and Kevlar-protected cable for geotechnical applications.

TECHNICAL FEATURES

	Phycocyanin*
Excitation	590 nm
Detection	650 nm
Linear Range	0-4 000 ppb
Dynamic Range	0-9 000 ppb
Minimum Detection (3x SD in RO water)	2 ppb
Linearity	0.99 R ²
Response Time	0.03 - 2 sec
Output Rate	0.5 Hz to 16 Hz (free running) software controlled

* Calibrated against Phycocyanin in water / Phosphate buffer solution.



ELECTRICAL

External	9 - 28V DC Isolated
Power	< 600mW
Connector	SubConn MCBH6F

ORDERING

0901001 - C	Hyperion Chlorophyll a instrument
	Supplied with: <ul style="list-style-type: none"> • Y lead • Manual and transit case • Valeport Configure Software
0901EA2	<ul style="list-style-type: none"> • Hyperion to EnviroLog System interface cable • Various lengths available
0901251	• Sensor Guard

SOFTWARE

Valeport Configure software is supplied. Windows 10 software for instrument setup.

PHYSICAL

Materials	Titanium with glass window
Depth Rating	6,000m
Dimensions	40mmØ x 179.5mm (including connector)
Weight	0.50 kg (in air)
	0.26 kg (in water)
Operating Temp	-5°C to 35°C (the sensor is damaged above 60°C)

COMMUNICATIONS

The instrument will operate in real time, with set up performed by direct communications with a PC before deployment.

RS232 RS485	2400 - 230400 baud rate 8 data bits 1 stop bit No Parity No Flow Control
USB	Supplied cable and converter (RS232 to USB)
RS485 Modbus RTU (standard)	19200 baud rate 8 data bits 1 stop bit Even Parity No Flow Control

Products	References
HYPERION PHYCOCYANIN	Phycocyanine

HYPERION CHLOROPHYLL A

HYDROLOGICAL TRACING

Valeport's Hyperion Chlorophyll A fluorometer measures Chlorophyll A levels with high precision. The compact and robust «Hyperion» range is ideal for use as a stand-alone sensor, connected to our stand-alone data loggers such as EnviroLog / EnviroLog 4G and other data loggers on the market, as well as all remote management PLCs on the market.

Available as standard in a titanium casing capable of withstanding a depth of 6,000 m, the Hyperion fluorometer features a wide-range isolated power supply (9-28 VDC), data output up to 16 Hz, and RS232 and RS485 interfaces with ASCII and Modbus RTU communication protocols. Hyperion offers the best dynamic range on the market, requiring no adjustment or gain setting.

The detection range of the Chlorophyll a fluorometer is 0-800 µg/l. Hyperion fluorometers are available in a more resistant version. This includes acetate protection rings, anti-snap connector protection and Kevlar-protected cable for geotechnical applications.

TECHNICAL FEATURES

	Chlorophyll a*
Excitation	470 nm
Detection	696 nm
Dynamic Range	0-800 g/l
Minimum Detection (3x SD in RO water)	0.025 g/l
Linearity	0.99 R ²
Response Time	0.03 - 2 sec
Output Rate	0.5 Hz to 16 Hz (free running) software controlled

* Calibrated against Chlorophyll a in acetone solution



ELECTRICAL

External	9 - 28V DC Isolated
Power	<600mW
Connector	SubConn MCBH6F

ORDERING

0901001 - C	Hyperion Chlorophyll a instrument
	Supplied with: <ul style="list-style-type: none"> • Y lead • Manual and transit case • Valeport Configure Software
0901EA2	<ul style="list-style-type: none"> • Hyperion to EnviroLog System interface cable • Various lengths available
0901251	<ul style="list-style-type: none"> • Sensor Guard

SOFTWARE

Valeport Configure software is supplied. Windows 10 software for instrument setup.

PHYSICAL

Materials	Titanium with glass window
Depth Rating	6,000m
Dimensions	40mmØ x 179.5mm (including connector)
Weight	0.50 kg (in air)
	0.26 kg (in water)
Operating Temp	-5°C to 35°C (the sensor is damaged above 60°C)

COMMUNICATIONS

The instrument will operate in real time, with set up performed by direct communications with a PC before deployment.

RS232 RS485	2400 - 230400 baud rate 8 data bits 1 stop bit No Parity No Flow Control
USB	Supplied cable and converter (RS232 to USB)
Modbus RTU (standard)	19200 baud rate 8 data bits 1 stop bit Even Parity No Flow Control

Products	References
HYPERION CHLOROPHYLLE	Chlorophylla

HYPERION TURBIDITY

HYDROLOGICAL TRACING

OPTICAL TURBIDITY SENSOR

The new Valeport Hyperion-T is essentially 2 sensors in one. The first is a "classic" turbidity sensor, a nephelometer that uses a 90° beam angle, for low turbidity levels (0 to 1,000 NTU). The second, for high turbidity levels (1,000 to 6,000 NTU) uses an Optical Backscatter (OBS) arrangement (~120° beam angle).

Intelligent sampling and use of a 24 bit ADC eliminates the need to gain switch at higher turbidity levels. The optical head is very compact - measuring just 20mm in diameter and with a full ocean depth rating lends itself to OEM type solutions. A compact & robust package ideal as a standalone sensor, for ROV and AUV integration or used as part of a multi-sensor array and data logger system.

Offered as standard in a 6,000m depth rated, titanium housing the Hyperion Turbidity Instrument has a wide range (9-30V DC) isolated power supply, data output up-to 16Hz on RS232 and RS485 or Modbus.

TECHNICAL FEATURES

	Turbidity
Dynamic Range	Nephelometer: 0 to >1,000 NTU - linear response OBS: 0 to >6,000 NTU - linear response >6,000 NTU has a non-linear monotonic response that allows derivation of higher values using look-up tables
Linearity	0.99 R2
Minimum Detection Level	0.03 NTU (Nephelometer)

* Calibré par rapport à une solution de fluorescéine ou de rhodamine



ELECTRICAL

External	9-30V DC Isolated
Power	<600mW
Connector	SubConn MCBH6F

ORDERING

0901002 - T	Hyperion Turbidity
	Supplied with: <ul style="list-style-type: none"> • 1x Hyperion Instrument • 1x 0.5m pig tail • Manual and transit case • DataLog x2 Software
0901EA2	<ul style="list-style-type: none"> • Hyperion interface cable to Envirolog system • Cable Several cable lengths available

SOFTWARE

Valeport Datalog X2 software for instrument setup

PHYSICAL

Materials	Titanium with Sapphire glass window
Depth Rating	6 000m
Dimensions	40mmØ x 179.5mm (including connector)
Weight	0.50 kg (in air)
	0.26 kg (in water)
Température de fonctionnement	Entre -5°C et 35°C (au-dessus de 60°C, le capteur sera endommagé)

COMMUNICATIONS

The instrument will operate in real time, with set up performed by direct communications with a PC before and after deployment.

RS232 RS485	Baud rate: 2400 - 230400 8 data bits 1 stop bit No parity No flow control No flow control USB: cable and converter supplied (RS232 to USB)
RS485 Modbus RTU	19200 baud 8 data bits / 1 stop bit / Same parity / No flow control No flow control

Products	References
HYPERION TURBIDITY	Hyperion TURB

HYPERION SULFORHODAMINE B

HYDROLOGICAL TRACING

Valeport's Hyperion Sulforhodamine B sensor delivers high performance measurements of Sulforhodamine B in a compact & robust package ideal as a standalone sensor, for ROV and AUV integration or used as part of a multi-sensor array and data logger.

Offered as standard in a 6000m depth rated, titanium housing the Hyperion Fluorometer has a wide range (9-28V DC) isolated power supply, data output up to 16Hz and RS232, RS485 and Modbus RTU communication protocols. Hyperion offers an industry leading dynamic range with no adjustment of gain settings required. Hyperion Fluorometers can be supplied in a more rugged form that includes Acetal protection rings, a shaped anti-sag connector cover and a Kevlar weave protected cable

TECHNICAL FEATURES

	Sulforhodamine B*
Excitation	520 nm
Detection	650 nm
Dynamic Range	0 - 1000 ppb
Minimum Detection (3x SD in RO water)	0,03 ppb
Linearity	0.99 R2
Response Time	0.03 - 2 sec
Output Rate	0.5 Hz to 16 Hz (free running) software controlled

* Calibrated against Sulforhodamine B solution



ELECTRICAL

External	9 - 28V DC, Isolée
Power	<600mW
Connector	SubConn MCBH6F

ORDERING

0901001 - SRB	Hyperion Sulforhodamine B instrument
	Supplied with: <ul style="list-style-type: none"> • Ylead • Manual and transit case • DataLog X2 Software
0901EA2	<ul style="list-style-type: none"> • Hyperion interface cable to Envirolog system • Cable Several cable lengths available

SOFTWARE

Valeport supply DataLog X2 Windows software for instrument setup.

PHYSICAL

Materials	Titanium with Sapphire glass window
Depth Rating	6 000m
Dimensions	40mmØ x 179.5mm (including connector)
Weight	0.50 kg (in air)
	0.26 kg (in water)
Operating Temperature	-5°C to 35°C (the sensor is damaged above 60°C)

COMMUNICATIONS

The instrument will operate in real time, with set up performed by direct communications with a PC before deployment.

	Débit en baud : 2400 - 230400
RS232 RS485	8 bits de données 1 bit d'arrêt Pas de parité Pas de contrôle de flux USB: câble et convertisseur fournis (RS232 vers USB)
	2400 - 230400 bauds
RS485 Modbus RTU	8 bits de données 1 bit de stop Parité paire Pas de contrôle de flux

Products	References
SULFORHODAMINE B	Hyperion SULFO

HYPERION VALIDATION

BY CETRAHE
 R&D CELL FOR EXPERTISE AND TRANSFER IN TRACING
 APPLIED TO HYDROGEOLOGY AND THE ENVIRONMENT



OBJECTIVES

The CETRAHE R&D unit (Cellule R&D d'Expertise et de Transfert en Traçages appliqués à l'Hydrogéologie et à l'Environnement de l'Université d'Orléans) was asked to collaborate on a test and validation programme to evaluate the sensitivity and measurement accuracy of Valeport Water's Hyperion range of fluorometers with CETRAHE's HITACHI F2500 spectrofluorometer by carrying out fluorescence measurements, for different concentrations of uranine and sulforhodamine B, in a controlled environment.

To perform the measurements with both the fluorometer and the spectrofluorometer, a simple protocol was established. Solutions with different and unknown concentrations were made, the concentrations were measured with both the spectrofluorometer and the Hyperion. The results are shown in the graph below.

Results obtained

CONCLUSION OF THE EVALUATION

Extract from the report produced by CETRAHE : «The raw results show consistent values between the measurements obtained by the fluorometer and the laboratory spectrofluorometer. [...] The first series of tests showed a very good sensitivity of the «Valeport» fluorometer with regard to the detection of the two tracers as well as a

very honourable measurement performance. These laboratory tests with CETRAHE demonstrated good measurement quality and accuracy of Valeport Water's Hyperion compared to a reference spectrofluorometer. For more details on the test conditions and findings, contact us or CETRAHE.

FOR ON-SITE INSTALLATION


Offered as standard in a titanium housing, the Hyperion Fluorometer has a wide range isolated power supply (9-28V DC), data output up to 16Hz and RS232, RS485 and Modbus RTU communication protocols. For on-site installation, in conjunction with the Hyperion Fluorometer, Valeport Water offers two different stand-alone data loggers for a complete measurement solution.

THE ENVIROLOG

A stand-alone logger that integrates everything needed for operation: data display, data logging and battery power in a small, rugged case.

THE ENVIROLOG 4G

A modular, rugged, 4G communicating, stand-alone data logger that provides a highly flexible solution. The EnviroLog 4G is a 'platform' that provides fully programmable operational scenarios for data collection, processing and distribution of data.

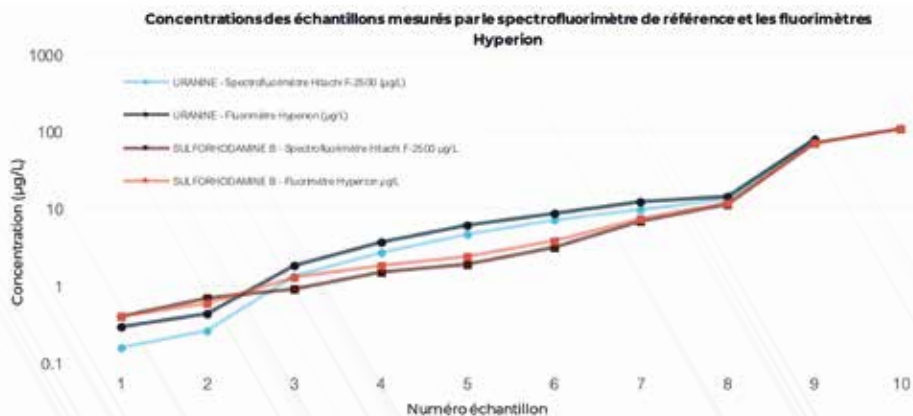

FLUOROMETERS AND DATA LOGGERS

TARIFF GRID 2024/2025
 EQUIPMENT RENTAL

VALID UNTIL 03/2025

Fluorometers and data loggers are essential equipment for professionals working in the fields of tracing, analysis, and monitoring of fluorescent tracers.



EQUIPMENT DESIGNATION	WEEK 1	Additional Cost per Extra Week (0 to 4 months)
Envirolog + External Battery	235 €	50 €
Envirolog 4G + External Battery*	380 €	85 €
Rhodamine Fluorometer Probe	250 €	50 €
Sulforhodamine B Probe	180 €	50 €
Fluorescein Probe	180 €	50 €
Turbidity Probe	180 €	50 €
Chlorophyll A Probe	180 €	50 €
10m Cable	20 €	5 €
30m Cable	60 €	20 €
Backup Battery (If duration > 1 Month)	20 €	5 €
Battery Charger	20 €	5 €

ADDITIONAL SERVICES


One-hour online training on equipment handling	90 €
On-site training with equipment delivery	QUOTE UPON REQUEST



Provided with SIM card and Webserver
Prices Excluding 10% Insurance and Transport
 For requests exceeding 4 months,
 a specific quote will be provided.

APPLICATIONS AND GOALS

HYDROLOGICAL TRACING

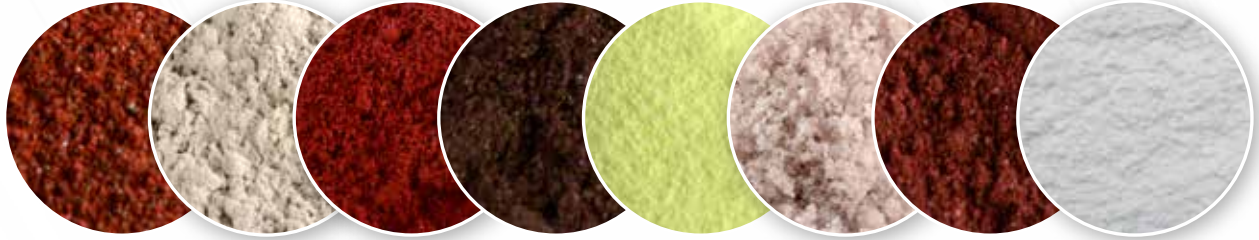

APPLICATIONS	GOALS
ABSTRACTION OF GROUNDWATER / SPRING WATER	<ul style="list-style-type: none"> • Delimitation of a supply catch basin • Check that a determined point is found in the catch basin • Study of the respective inputs of different waters
PROTECTION AREAS OF UNDER-GROUND WATERS	<ul style="list-style-type: none"> • Check of an hydraulic connection between the injection and catch point • Study of transit times and flow velocity • Sizing of protection zones
SUPPLY AREAS OF RUN-OFFS	<ul style="list-style-type: none"> • Delimitation of feeding areas • Check that a given location is found in the feeding area of capture • Knowledge of underground inflows
RISKS ASSESSMENT INCIDENTS SIMULATION	<ul style="list-style-type: none"> • Check of a hydraulic connection and an installation/ a capture site • Assessment of the operational timing • Monitoring of implantation of the supervision point • Estimate of the size of the impacts during risk assessments • Simulation of the incidental effect causing infiltration of dangerous liquids in underground waters
CONTAMINATED SITES DUBIOUS AREAS	<ul style="list-style-type: none"> • Study of seepage runoff • Verification of the right place of sampling points downstream from a site
LANDFILLS	<ul style="list-style-type: none"> • Verification of outflows under existing landfills • Monitoring of seepage paths : meteoric waters flow towards foreseen drainages • Monitoring of waterproofing of cover layers • Assessment of sites for new landfills : e.g. verification that a site is away from a supply catch basin • Verification of the right spot of the surveillance point
INTERACTION SURFACE WATERS / GROUND WATERS	<ul style="list-style-type: none"> • Detection and localization of seepage or water flows exfiltration sections • Detection of outflows under water streams • Identification of drain places of closed lakes
DETECTION OF PARASITE WATERS	<ul style="list-style-type: none"> • Identification et quantification of the arrival to a seepage catch coming from a water stream • Verification of the arrival to a capture of close rainwater infiltrations
DRILLING / PIEZOMETER	<ul style="list-style-type: none"> • Control of the representativeness of underground water samples through tagging the drilling fluid • Control of leak-proof caps dividing various levels of catchment
EXPERT ASSESSMENT IN CASE OF DAMAGES	<ul style="list-style-type: none"> • Verification of the point of entry of waters seeping into a building
DETERMINATION OF AQUIFER PARAMETERS / MODELLING OF GROUND-WATER FLOWS	<ul style="list-style-type: none"> • Determination hydraulic parameters such as the outflow velocity and dispersion coefficient • Calculation of the storing volume from empty volumes allowing outflow • Adapt and validate outflow models and mass transport in solution form • Verifications of outflows directions predicted with respect to observed directions

IMPLEMENTATION OF TRACINGS

SOURCE CETRAHE

BEFORE THE REALIZATION OF A TRACING, SOME PRELIMINARY STEPS HAVE TO BE PLANNED :

The first is to determine the objectives of the tracing: reconnaissance tracing of underground circulation, simulation of pollution transfer, aquifer characterization test with the determination of hydrodispersive parameters (circulation speed, kinematic porosity, dispersivity), etc... This step is very important because the strategic choices that will be adopted thereafter will be a compromise between objectives and cost.

The 2nd step consists in collecting a maximum of existing information, as well as documentation on previous tracings (cf. article dedicated to the regional inventory). The collected information must include all geographical, topographical, geological, hydro-geological and anthropic data (water uses, catchments, etc...).

As for previous tracings, even if they do not have a satisfactory reliability compared to today's evaluation criteria, they will be rich in information and very useful to avoid certain pitfalls.

The 3rd step is the recognition of the site where the tracing will be carried out. It consists in identifying potential injection points (direct access or via an unsaturated zone, absorption capacity, possibilities of loading and overflows, need for flushing, accessibility in particular to vehicles transporting water intended for flushing, etc.) and potential release points (catchments, uncaught sources, surface water outlets, operation, accessibility, possible flow measurement, etc.).

At the end of this visit, it is important to examine the feasibility of setting up the various monitoring devices (manual sampling, installation of automatic samplers, installation of fluorometer, attachment of activated carbon detectors, influence of pumping regimes, influence of chlorination, ...) and to anticipate the hydro-logical conditions which may be different (and vary) at the time of the test.

AFTER HAVING APPROACHED THESE STEPS, ONE CAN THEN PROCEED TO THE DIMENSIONING OF THE TRACING.



TRACING OR MULTI-TRACING ?

A multi-tracing consists in simultaneously injecting different tracers at several injection points. It allows to answer several questions at the same time, to reduce the cost and to save a considerable amount of time. On the other hand, it imposes a judicious choice of the tracers used, sufficiently conservative in the context, and without presenting analytical interferences between them.

STEP 1

STEP 2

STEP 3



NOTE

IT IS ADVISABLE TO AVOID MULTI-TRACKING INVOLVING MORE THAN 3 TO 4 TRACERS, AT THE RISK OF USING LESS EFFICIENT TRACERS, AND CONFUSION IN THE MONITORING AND INTERPRETATION OF THE RESTITUTION CURVE(S).

The choice of tracer(s) is particularly important for the dimensioning of multi-tracking, as it determines the final result according to its performance and also influences other strategic choices (quantity of injection and types of monitoring). A good knowledge of the physico-chemical properties of the tracer(s) as well as their behaviour according to the environment(s) allows to better adapt the tracer(s) to the geological, physical and hydrological context.

The quantity of tracer to be injected is always a delicate question. Several formulas exist, but they suppose an a priori knowledge of the environment and the parameters representing it, the ideal is to have already carried out a tracer in an equivalent context. The TRAC software (free of charge), in its «Simulation» section, allows to make estimates requiring the selection of the analytical solution adapted to the hydrogeological context, corresponding as well as possible to the transit of the tracer in the chosen tracing system.



In practice, the quantity is expertly estimated, taking into account the hydrogeological context. Between empiricism, intuition and experience, to decide the question, two determining elements must be taken into account: the dilution that the tracer should undergo, often approached by means of distance and the analytical performance of the tracer, and the monitoring modes.

simulation tracings in contrasted hydrological conditions (low and high waters), because the results obtained can fluctuate in large proportions.

MONITORING AND ANALYSIS MODE

During a tracing operation, the analytical component is of great importance. A reliable interpretation can only be formulated from results based on strictly controlled measurements and analytical logic.

THE MODE OF TRACING AND ANALYSIS DEPENDS ON SEVERAL FACTORS :

- Type(s) of tracer(s) used: fluorescent, saline, ... ;
- Type of water point(s) monitored: source, catchment, borehole, river,... ;
- possibilities of installation of equipment: available space, security, power supply, access,... ;
- available budget.

The most reliable method of monitoring and analysis is water sampling with laboratory analysis. The laboratory equipment allows today the detection of substances in very low concentrations. For fluorescent tracers, laboratory spectrofluorometers (direct measurement of fluorescence) enable very low detection limits to be reached, of the order of 0.001 µg/L for uranine.

The spectral analysis carried out by a spectrofluorometer constitutes an essential diagnostic for the detection and interpretation of a trace, especially as the injection quantities are increasingly reduced in order to remain below the visibility threshold at the restitution points.


TO BE NOTED :

THE TRACER CANNOT PROVIDE INFORMATION ON THE ENTIRE HYDROLOGICAL OR HYDROGEOLOGICAL SYSTEM. THE RESULTS REFER ONLY TO THE PART TESTED. TO EXTRAPOLATE TO ANOTHER PART OF THE AQUIFER IT IS NECESSARY TO BE CERTAIN OF THE HOMOGENEITY OF THE ENVIRONMENT.

Good practices involve the transmission of information prior to the tracing operation to the authorities (DDT, gendarmerie, etc.) and local residents (town hall). In particular, this makes it possible to avoid fears and alerts related to the coloring of the water, in the case of fluorescent tracers or dyes. Before any injection, it is necessary to take water samples of control samples, and if the protocol includes the use of activated carbon detectors, it is also necessary to provide for the immersion of «control» fluosensors at an appropriate frequency. For reconnaissance tracings, the realization in periods of high water generally makes it possible to benefit from more favorable conditions, because of faster flows, by preferentially targeting a period of receding water level. It is recommended to carry out the

SPECTROFLUOROMETER

SOURCE : CETRAHE

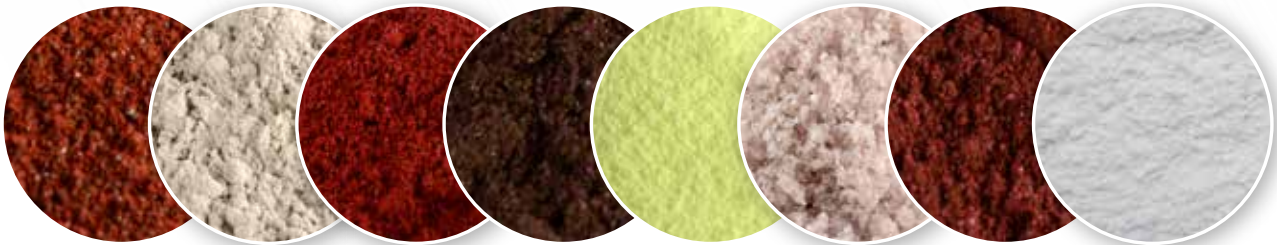

Field instruments allowing in situ measurements also contribute to the improvement of tracer tracking. More and more efficient instruments are available: field fluorometers, specific electrodes, sensitive conductivity meters, etc. For fluorescent tracers, the use of a field fluorimeter can be very useful. **Easy to use, these devices allow to obtain results in near-real time, even in case of multi-tracking. However, it is advisable to avoid using them as the only tracking device, especially for multi-tracking.** Indeed, variations in the natural fluorescence of the recorded water, as well as interferences between tracers, can be misinterpreted as restitutions. It is therefore advisable to couple this monitoring with automatic or manual sampling, in order to check by spectral analysis in the laboratory the presence or not of the tracer.

As for the activated carbon detectors (fluosensors) sometimes used for fluorescent tracers, it is advisable to use them as a last resort, when field conditions do not allow for another mode of detection. They can also be used as a secondary means of detection to spatially broaden tracking in the framework of reconnaissance tracing, in surveillance of «secondary» points. However, caution should be exercised in interpreting the results obtained. Among the common tracers, tracking by fluorosensor can only be envisaged for tracers such as uranine or eosin, with a certain number of precautions (cf. technical note n°1 of CETRAHE). Red tracers (Rhodamine type) cannot be monitored by this method, since activated carbon has shown an inability to fix them under laboratory conditions at water concentrations below 30 µg/L. The fluorosensor method is also unsuitable for fluorescent tracers that emit in the blue (Sodium Naphthionate, Acid Amino.G., Tinopal).

Finally, ionic tracers (salts) can be determined with great analytical precision by different devices (Ion chromatography, spectrophotometry, atomic absorption spectroscopy, etc.). However, the natural presence of these ions in water parasites their detection in low concentrations, despite the performance of the apparatus used. The dosage of the injected quantity must therefore be particularly studied, so that it is high enough to be detected at the monitoring points and moderate enough not to disturb water uses (water catchments, natural environments).

DATA EXPLOITATION AND INTERPRETATION

The results of a tracing are illustrated by the plotter's restitution curve, giving the evolution of concentrations as a function of time,

at the restitution point. The control of the flows at the point of restitution allows to calculate a restitution balance (restitution mass and percentage of restitution), and the Residence Time Distribution (RSD) which allows to describe the transit of the tracer in the tracing system.

The SDR corresponds to the probability density function which gives the probability that a tracer molecule has of staying in the system. It is indeed the distribution curve of the tracer cloud. When the injection can be assimilated to a «Dirac» impulse (i.e. a short injection), the SDR gives the impulse response of the tracer system for

NOTE

INSTRUMENTAL DETECTION LIMITS SHOULD NOT BE CONFUSED WITH ACTUAL DETECTION LIMITS WHICH ARE HIGHLY DEPENDENT ON THE BACKGROUND NOISE LEVEL IN NATURAL WATERS AND VARY DEPENDING ON THE TRACER.

the hydrological conditions in which it is located at the time of tracing. (Lepiller M. & Mondain P-H, 1986). From the SDR, a number of parameters describing the tracer's transit can be calculated, such as mean residence time and apparent velocity. The interpretation of the results is different according to the objective. For reconnaissance tracings, the main objective is to accurately assert the belonging of an injection point to the impluvium of the karstic system. For quantitative (simulation) tracings, it is important to describe precisely the transit modalities of the tracer, as well as the hydrodispersive parameters for tracings in porous media. Analytical tools to help in the estimation of the parameters exist. The TRAC software, in «Interpretation» mode of the tracings, allows to interpret a tracing using different analytical solutions by adjusting the parameters of the solution and comparison with the observation data.

Finally, at the end of the tracing operation and the interpretation of the results, the operator is invited to enter the information in the tracing database entry application. This is the database, with a national vocation, dedicated to the banking of the data.

OUR PARTNERS



ENVIRONNEMENT

THEY TRUSTED US



INSTITUTIONAL

INDUSTRY



FluoTechnik
FLUORESCENT DYES SOLUTIONS 

PAVIQUA - FLUOTECHNIK
9A Parc d'activité Bel Air - 84300 LES TAILLADES
+33 (0)4 86 69 63 72
contact@fluotechnik.com

FLUOTECHNIK.COM

